

**NEW7220**

# Wireless POS Terminal

Powerful performance, Simplicity with sophistication





## CPU

DUAL-CPU CORTEX A7

# 58mm

## 58mm

A thermal printer

# 2.4"

## 2.4 inch

TFT Screen



## Password keyboard

Safe and protected



## Battery

3.6V/2600mAh

## 2.4" Colour Display

NEW7220 with a TFT touchscreen display, comes with signature capture and support animation and image display, smooth display, easy to customize the exclusive interface.



# LONG-LASTING BATTERY

NEW7220 can make 300 transactions and has a standby time of up to 22 days. Because we use the industry leading system architecture and 3.6V/2600mAh large rechargeable Li-ion battery.



# Integrated printing function

58 mm high speed integrated thermal printer, convenient for printing receipts anytime and anywhere





# Full Internet communication

With a full range of communication of WiFi 4G 3G 2G LAN, NEW7220 is powerful, customizable, scalable setting up forward-thinking merchants for years to come.


# Built-in password keyboard

Supports MK/SK key management mode, supports RSA, AES, and SM2-SM4 algorithms, providing secure and reliable payment.



# Supporting All Payments

It supports various payment methods, such as magnetic card, IC card, contactless transaction and code scanning transaction. A machine can be used for various forms, making collection simple.

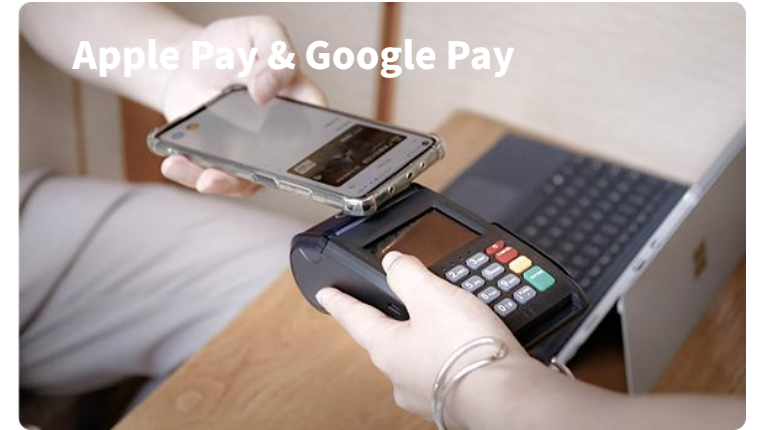



# Flexible Adaptability




Dining room



Bookstore



Bar

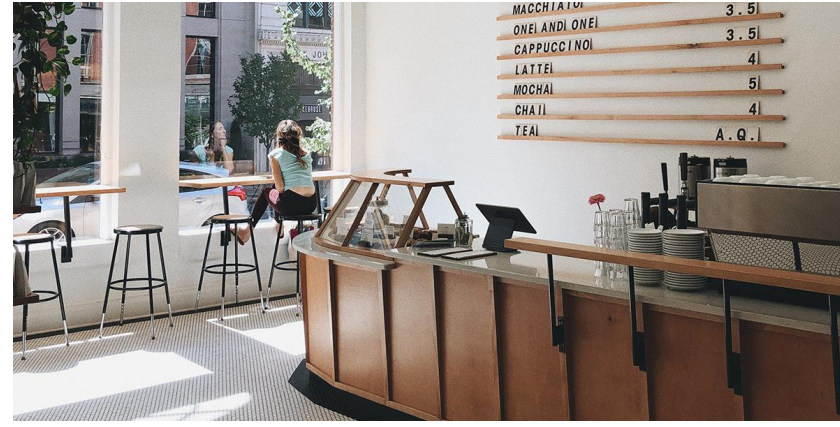

Cafeteria

# Specifications

---

## CPU

ARM Cortex A71.2GHz

## Memory

FLASH:256MB

RAM: 256MB

## Display

2.4"LCD.320X240 pixels

Resistive Touch Screen

## Keypad

10 alphanumeric keys

5 function keys

1 power switch key

## Card Reader

Magnetic Card Reader

Smart Card Reader

Contactless Card Reader

## Scanning

Optional, Support 1D & 2D

Code scanning

## Card slots

1×SIM+1×SAM

2×SIM+2×SAM(optional)

## Communication

4G(LTE)/3G(WCDMA)/2G(GPRS)

Optional WiFi(24GHz)

Optional LAN(Expansion Dock)

## Peripheral Ports

1 × Type-C USB2.0 Device

## Printer

High-Speed Thermal Printer

Paper Width: 58mm

Diameter:40mm

## Adapter/ Power

Input: 100~240VAC,50Hz/60Hz

Output:5V DC 1A

## Battery

Rechargeable Li-ion battery

3.6V/2600mAh

## Dimensions

L×W×H (mm):

163×79×58

## Audio

1 × Buzzer

## Storage Environment

Temperature:

-20°C~60°C(-4F~140F)

Humidity:

5%~95%(non-condense)

## Working Environment

Temperature:

0°C~50°C(32°F~122°F)

Humidity:

10%~90%(non-condense)

## Weight

320g (Including Battery)

## Certifications

PCI PTS 6.XEMV Level1&2 EMV

ContactlessL1Pavpass

Pavwave.American ExpressPay

Discover D-PAS,CE,TOM,RoHS